




TECHNICAL SPECIFICATIONS

type	condenser microphone
polar pattern	unidirectional
frequency response	50 - 18000Hz, +/- 2dB
impedance	600Ω
sensitivity	- 75dB
volume control	chime + microphone
selective call	8 zones
power supply	24V DC
dimensions (h x w x d)	58 x 180 x 145mm
weight	2.5kg
extra	power adapter
combination	MAT-8000

MIC-8000A

This microphone (in combination with the MAT-8000) allows you to put a call out in any zone you wish. Each of the buttons on your 'private' base has its own function. The attention signal helps catch everyone's notice (gong switch 2 to 4 tones). Pull the goose-neck towards you, adjust the volume and address every bystander. The LED light indicates that everything is okay. The MIC-8000A can be linked to the MAT-8000 with a cat 5 cable.

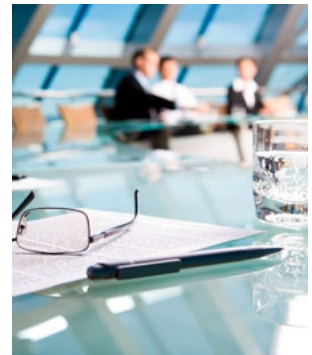

A call just intended for the board meeting? Not a problem with the MIC-8000A: discreet, but direct.