



CDPS-UA1H10HS

1 By 10 HDMI UHD Splitter



Operation Manual



DISCLAIMERS

The information in this manual has been carefully checked and is believed to be accurate. Cypress Technology assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

Cypress Technology assumes no responsibility for any inaccuracies that may be contained in this document. Cypress also makes no commitment to update or to keep current the information contained in this document.

Cypress Technology reserves the right to make improvements to this document and/or product at any time and without notice.

COPYRIGHT NOTICE

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means—electronic, mechanical, magnetic, optical, chemical, manual, or otherwise—without express written permission and consent from Cypress Technology.

© Copyright 2015 by Cypress Technology.

All Rights Reserved.

Version 1.0 March 2015

TRADEMARK ACKNOWLEDGMENTS

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.

SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply.

Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
- Do not attach the power supply cabling to building surfaces.
- Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
- Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
- To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.

REVISION HISTORY

| VERSION NO. | DATE DD/MM/YY | SUMMARY OF CHANGE |
|-------------|---------------|---------------------|
| VR0 | 18/06/15 | Preliminary Release |
| | | |



CONTENTS

| | |
|---|----------|
| 1. Introduction..... | 1 |
| 2. Applications..... | 1 |
| 3. Package Contents | 1 |
| 4. System Requirements..... | 1 |
| 5. Features..... | 2 |
| 6. Operation Controls and Functions..... | 3 |
| 6.1 Front Panel..... | 3 |
| 6.2 Rear Panel..... | 4 |
| 7. Connection Diagram | 5 |
| 8. Specifications | 6 |

1. INTRODUCTION

This 1 by 10 HDMI Splitter with HDCP 2.2 is an advanced solution for splitting a single HDMI input to ten HDMI outputs. It provides high performance audio and video output through HDMI cables up to 4K2K@60Hz_YUV420 resolution and is capable of receiving and transmitting up to 9Gbps of bandwidth with no data loss. Supporting the latest features you can be assured of reliable and high quality HDMI distribution.

2. APPLICATIONS

- Home entertainment
- Showroom display
- Educational demo
- Commercial advertisement

3. PACKAGE CONTENTS

- 1 By 10 HDMI Splitter
- 5V/6A Power Adaptor
- Power Cord
- Operational Manual

4. SYSTEM REQUIREMENTS

Input source equipment such as DVD/Blu-ray player and output HD display/Monitor with HDMI cables.




5. FEATURES

- HDMI (with 3D & 4K2K supported) and HDCP2.2/1.4 compliant
- Supports HDTV resolutions up to 4Kx2K (3840x2160@24/25/30, 3840x2160@50/60 YUV_420 & 4096x2160@24/25/30, 4096x2160@50/60 YUV_420) and PC resolutions up to WUXGA@60Hz(RB)
- Supports HDMI data rate up to 9Gbps and 'Deep Color' up to 1080p/36-bit
- Supports simultaneous outputs on ten HDMI
- Supports pass-through of audio formats: LPCM 2/5.1/7.1CH, Dolby Digital 2~5.1CH, DTS Surround, Dolby Digital Plus, Dolby TrueHD, Dolby Atmos and DTS-HD Master Audio
- Supports EDID selection functions
- Supports CEC system reset functions

6. OPERATION CONTROLS AND FUNCTIONS


6.1 Front Panel

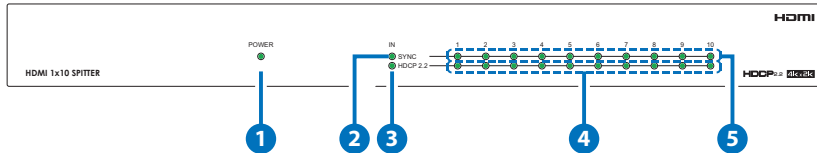

- ❶ **POWER LED:** This LED will illuminate in green when the device is power On.
- ❷ **SYNC IN:** This LED will illuminate when the device is connected with active source signal.
- ❸ **HDCP 2.2 IN:** This LED will illuminate when the input source signal is with HDCP 2.2 encrypted.
- ❹ **SYNC LED 1~10:** These LEDs will illuminate when the output detect Hot-Plug Detection(HPD) from display TV/monitors.
- ❺ **HDCP 2.2 LED 1~10:** These LEDs will illuminate when the output HDMI display are in the HDCP 2.2 handshaking status.



6.2 Rear Panel

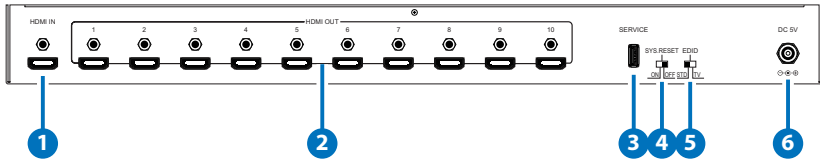

- 1 HDMI IN:** Connect from source equipment such as Blu-ray/DVD/PS3 players, Set-Top-Box or any HDMI equipped source device.
- 2 HDMI OUT 1~10:** Connect to HDMI TV/display or HD Amplifier for output video and/or audio.
- 3 SERVICE:** This slot is reserved for firmware update use only.
- 4 SYS. RESET ON/OFF:** Switch this switch to ON allow the device to reset the output image with the source every 10 minutes.

It will force the connected TV/display to switch its HDMI port to where the device is connected to ensure image display always. Reset will be performed in sequence from 1~10 with 1 minute a port. Default setting is OFF, leave as it is to disable the reset function.

Note: TV/monitor must obtain CEC function in order to react accordingly.

- 5 EDID STD/TV:** Switch this switch to set HDMI EDID's setting.


Switch to TV mode allows the device to copy HDMI OUT 1's EDID. For example, when input source support 4K2K contents and output 1 also connected with 4K2K display. The device will send 4K2K contents to output 1~10 however, if output 2~10 are connected to non-4K2K TV/monitor then port 2~10 may have no image display therefore, to ensure all outputs obtain image display OUT 2~10's EDID must obtain the equivalent EDID to OUT 1.

Switch to STD mode the EDID will support 1080p for video and PCM 2CH for audio.

- 6 DC 5V:** Connect the adaptor included in the package and connect to AC wall outlet for power supply.

7. CONNECTION DIAGRAM

DVD or Blu-ray Player

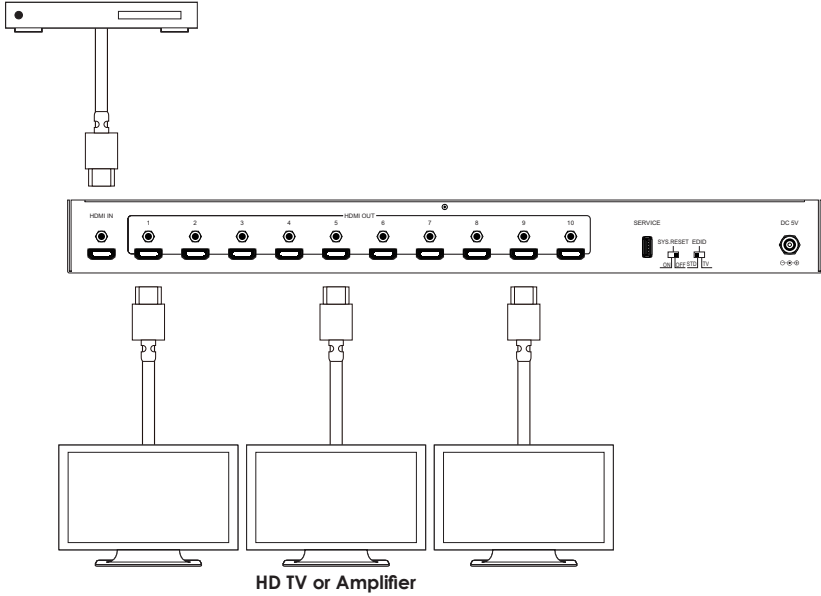



8. SPECIFICATIONS

| | |
|------------------------------|--|
| Video Bandwidth | 300MHz / 9Gbps |
| Input Ports | 1 x HDMI 1 x USB (Service only) |
| Output ports | 10 x HDMI |
| HDMI I/O Cable | 10M/1080p |
| Length | 5M/4K2K |
| Power Supply | DC 5V/6A (US/EU standards, CE/FCC/UL certified) |
| ESD Protection | Human Body model: ±8kV (air-gap discharge) ±4kV (contact discharge) |
| Dimensions | 436mm (W) x 160mm (D) x 44mm (H)/Jacks Excluded 436mm (W) x 165.5mm (D) x 49mm (H)/Jacks Included |
| Weight | 1856 g |
| Chassis Material | Metal |
| Silkscreen Color | Black |
| Operating Temperature | 0°C~40°C / 32°F ~ 104°F |
| Storage temperature | -20°C~60°C / -4°F ~ 140°F |
| Relative Humidity | 20~90% RH (no condensation) |
| Power Consumption | 16w |

| DVI/HDMI Supported Resolutions | Input | Output |
|--------------------------------|-------|--------|
| 640x480@60/72/75 | ✓ | ✓ |
| 720x480@60 | ✓ | ✓ |
| 720x576p@50 | ✓ | ✓ |
| 800x600@60/72/75 | ✓ | ✓ |
| 1024x768@60/70/75 | ✓ | ✓ |
| 1280x720@50/60 | ✓ | ✓ |
| 1280x720p@60 | ✓ | ✓ |
| 1280x768@60 | ✓ | ✓ |
| 1280x800@60 | ✓ | ✓ |
| 1280x1024@60 | ✓ | ✓ |
| 1360x768@60 | ✓ | ✓ |
| 1600x1200@60 | ✓ | ✓ |
| 1920x1080i@50/60 | ✓ | ✓ |
| 1920x1080i@60 | ✓ | ✓ |
| 1920x1080p@24/25/30/50/60 | ✓ | ✓ |
| 1920x1200@60(RB) | ✓ | ✓ |
| 3840x2160@24/25/30 | ✓ | ✓ |
| 3840x2160@50/60_YUV420 | ✓ | ✓ |
| 4096x2160@24/25/30 | ✓ | ✓ |
| 4096x2160@50/60_YUV420 | ✓ | ✓ |



CYPRESS TECHNOLOGY CO., LTD

Home page: <http://www.cypress.com.tw>

MPM-CDPSUA1H10HS