

## MSD-V6 Modular Input MSD-VIV1UF

The MSD-VIV1UF is a 10GbE (SDVoE) modular input that is a factory-installed option for the MSD-V6 series. This modular input can receive 10GbE (SDVoE) signal over a fiber optic cable for a long-haul transmission. Up to 4K@60 video and multi-channel audio can be input. RS-232C/LAN control communication is also supported.

### ■ Specification

		MSD-VIV1UF
Video/Audio input	10GbE <sup>*2</sup>	1 input SDVoE, AES-128 Deep Color <sup>*1</sup> 640x480@60 to 2560x1600@60 Reduced Blanking 480p, 576p to 3840x2160@24/25/30/50/59.94/60 (4:4:4), 3840x2160@50/59.94/60 (4:2:0), 4096x2160@24/25/30/50/59.94/60 (4:4:4), 4096x2160@50/59.94/60 (4:2:0) Color depth: 24/30 bits *For all supported video signals, see the specification of MSD-V6. LPCM: Up to 8 channels Sampling frequency: 32/44.1/48/88.2/96/176.4/192 kHz Reference level: -20 dBFS, Max. input level: 0 dBFS RS-232C/LAN Connector: SFP+ *For SFP+ transceiver specification, see the table below.

<sup>\*1</sup> x.v.Color/3D/HDR/ARC/HEC are not supported.

<sup>\*2</sup> For 10GbE extension, use this product in combination with IDK's other SDVoE supported products.


### ■ SFP+ transceiver specification

P/N	MSD-VIV1UF-MM	MSD-VIV1UF-SM	Optional	MSD-VIV1UF
SFP+ transceiver	10G-MM-SFP	10G-SM-SFP	10G-SM40-SFP	Without SFP+ transceiver
Fiber	Multimode fiber	Singlemode fiber	Singlemode fiber	N/A
Wave length	850 nm (VCSEL laser)	1310 nm (DFB laser)	1550 nm (EML laser)	
Laser safety	Class 1 (JIS C 6802, IEC60825-1)			
Maximum distances*	OM3: 984 ft. (300 m)	OS1: 6.21 mi. (10 km)	OS1: 24.85 mi. (40 km)	
Receiver sensitivity (OMA) @10.3Gbps	-11.1 dBm or higher	-12.6 dBm or higher	-16 dBm or higher	
Average Launch Power	-5 dBm to -1 dBm	-8.2 dBm to +0.5 dBm	-1 dBm to +2 dBm	
Max. input power	+0.5 dBm	+0.5 dBm	-1 dBm	
Polishing	PC polishing	UPC polishing, SPC polishing *APC polishing is not supported		
Connector	LC (Duplex)			

\*The maximum transmission distance is measured under the following conditions: Fiber that is polished by a recommended method is used, there is no interconnection, and the allowable bending radius is not exceeded.

### ■ Front & Rear Panels

MSD-V62UF with MSD-VIV1UF (Option)

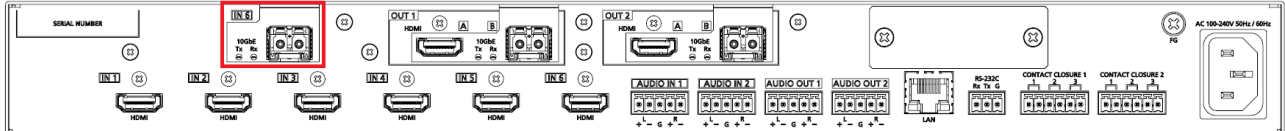

●All specifications and drawings are subject to change without notice. ●HDBaseT™ and the HDBaseT Alliance Logo are trademarks of the HDBaseT Alliance. ●The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. ●SDVoE™ and SDVoE logo are trademarks of SDVoE Alliance. ●All other company and product names mentioned in this document are either registered trademarks or trademarks of their respective owners. In this document, the “®” or “™” marks may not be specified. ●©2023 IDK Corporation, all rights reserved.