


Monitor interattivo

Sharp/ NEC PN-LA752

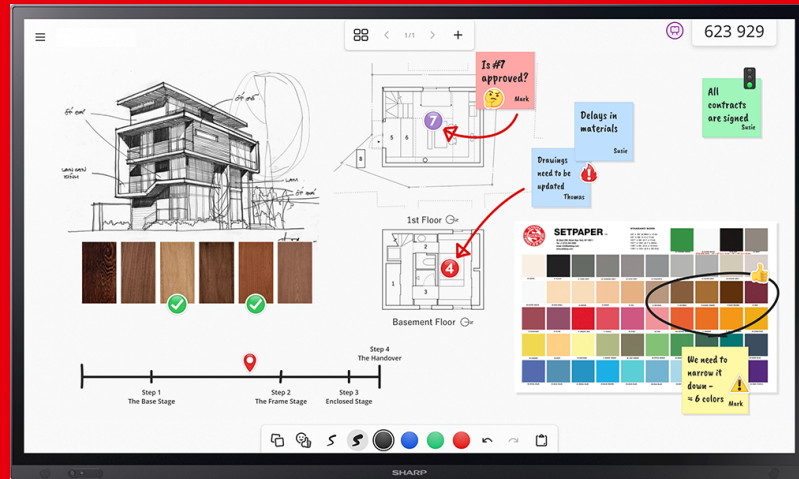

- Most natural writing experience – InGlass™ M5 premium touch system supports patented pressure sensitivity using passive pens as well as Windows Ink and palm rejection.
- Optional Windows based Intel SDM slot-in PC – driving unlimited versatility with powerful integrated computing for quick and easy access to your apps offering a secure and locked environment.
- Energy efficiency – built-in functionality including an ambient light sensor, human presence detection and eco modes help to reduce power consumption.
- Secure by design – the non-Android platform with additional security features meets the highest IT security standards.
- Increase your productivity – benefit from a free one-year license for FlatFrog Board for Rooms. FlatFrog Board whiteboard software makes hybrid work easy and productive for everyone

Specifiche

DATI MODULO DISPLAY

Tecnologia a pannello	IPS with Direct LED backlights
Risoluzione nativa (Pixel)	3840 x 2160
Dimensioni diagonali (pollici / cm)	75 / 189.3
Proporzioni	16:9
Tecnologia a retroilluminazione	LED
Luminosità (cd/m2)	450
Contrasto	1200:1
Tempo di risposta (media grigio su grigio) ms	8
Angolo visuale (H/V) 0 CR >10	178 / 178
Colour Depth [bn]	1.073 (10bit)

SPECIFICHE INTERFACCIA TATTILE

Tecnologia	InGlass™ M5
Numero di punti tattili	20
Rivestimento / filtro	Anti-glare coating
Resistenza schermo (H)	≥ 8
Compatibilità Sistema operativo	Native Multi-Touch: Windows 7, Windows 8, Windows 10, Linux, Android; Default Mouse: Windows XP, Windows Vista, Mac OS X
Thickness [mm]	3
Haze Level [%]	4 ~ 8
Touch Method	Finger; Gloves; Stylus (≥ 2 mm)
Data Interface	USB-HID
Accuracy [mm]	< 1
Palm Rejection	Yes
Windows Ink	Yes

PESI E MISURE

Dimensione lunetta (S/D) mm	4.8
Dimensione lunetta (A/B) mm	4.8 / 32.3
Dimensioni del prodotto (L/A/S) mm	1,720.1 x 1,025.9 x 86.5
Peso del prodotto senza stand (Kg)	56.5

CONNETTIVITÀ (AUDIO/VIDEO) INPUT

HDMI	2
DisplayPort	1

CONNETTIVITÀ (DATI CONTROLLI/SERIALI)

RS232C IN	1
Porta LAN	1
USB	4

SPECIFICHE CHIAVE

Special Characteristics	DICOM Simulation; HDMI ARC; Powered USB Port (5 W)
Funzionamento certificato 24/7	•
Oscuramento locale	•
Altoparlanti incorporati (W)	10 W + 10 W
Power Management	•

ALIMENTAZIONE E AMBIENTE DI FUNZIONAMENTO

Tensione operativa (ACV) / Frequenza (Hz)	100-240; 50 / 60
Consumo di corrente (W) (funzionamento MASSIMO)	205 shipping
Temperatura operativa (oC)	+5 to +35
Umidità (%)	20 to 80
Power Savings Mode [W]	< 0.5 (ECO Standby); < 2 (Networked Standby)

INSTALLAZIONE

Orizzontale	•
Verticale	•
Montaggio (VESA/Numero di punti/picco mm)	4; 600 x 400

CONNETTIVITÀ (AUDIO/VIDEO) OUTPUT

DisplayPort	1
Presa Audio/Cuffie da 3,5mm	1

ACCESSORI

Shipping Contents	1x 300 cm USB Cable; 2 x Passive Stylus; 2x AAA batteries; Blank Sticker; Bracket for Camera; Bracket for Mini PC; Cable Clamps; Display; Power Cable; Remote Control; Setup Manual
-------------------	---

